

AUTOMATION TECHNOLOGY ENGINEERING INDUSTRIAL TRADE INDUSTRIAL SERVICE **TECHNICS**

DOLLY | D 10.111-C-L



figure: D 10. 111-C-L

The **dolly D 10. 111-C-L** of the Blumenbecker Technik GmbH is **faster transportable** and **maintenance-friendly**. The dolly D 10. 111-C-L is also **intelligent** and **adaptable**.

By an easy decreasing of the side parts fits the dolly D 10. 111-C-L easily in an standard-40 $^{\prime\prime}$ -container.

Thus you can dispatch your dollies at a reasonable price – for example to other airports to be able to serve there high workload better.

Furthermore on the side damaged dollies can repair fast and simply by replacement of the side parts.

FAST MOUNTING EASY OPERATING SAFETY WORKING



length (shaft up) 5420 mm

length (shaft down) 4300 mm

<mark>width</mark> 2660 mm

width basic element 2010 mm

<mark>track width</mark> 2010 mm


wheelbase 2125 mm


width side part 320 mm

height loading platform 520 mm

turning circle 12800 mm

max. driving speed 30 km/h net weight 1400 kg max. additional load 7000 kg additional load LD1, 2x LD2, 2x LD3, 2x LD4, LD6, LD7, LD8, LD9, LD11, BU, AXY, AMJ, palette 96"x108"

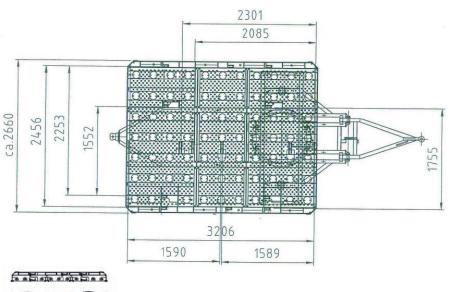



CONTACT

sales airport ground equipment P: +49 34636 714-0 F: +49 34636 714-29



Blumenbecker Technik GmbH, Bahnhofstraße 10, 06246 Bad Lauchstädt OT Schafstädt